


DISQ HF

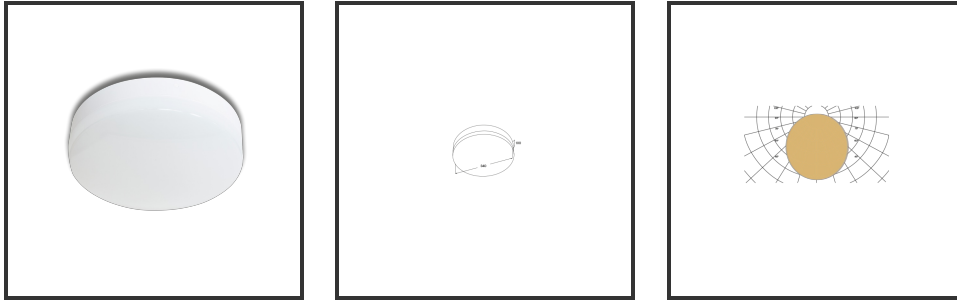

Beamangle	180°	Input current	480mA
CIE Flux Codes	46 76 95 100 93	IP	IP44
Colour Deviation (SDCM)	3 sdcM	Color	Wit
Colour Temperature	3000K	Led type	SMD
Max. connected Load	22W	Lumen Maintenance	L80B10 bij 50.000
Connected Voltage	220-240V	Lumen/W	135lm/W
CRI	80	Luminous flux of luminaire	2200lm
Dim	Nee	Material Housing	Plastic
Dimensions	Ø340x100	Material Lens/Reflector/Diffusor	Plastic
Energy Efficiency Class	D	Mounting Type	Ceiling
Forward Voltage	27-36V	PF	0,9
Frequency	50-60Hz	Protection Class	I
Glow Wire Test	850°C	UGR	<19
IK	07	Weight	0,5kg

Reference : 000002501

Product Description

The technical and timeless ceiling light resolutely opts for technology. A slightly convex front made of PVC makes the light source invisible. The satinised diffuser ensures uniform light distribution. The Disq is IP44-rated, making this downlighter resistant to dirt and water penetration. Equipped with a motion sensor so the Disq lights up when someone enters the room. Available in 3000K. Dimensions: 340x100. Ceiling or wall mounting possible. Applicable in public corridors, storage rooms and bathrooms.